


ONE CENTURY JOURNEY MORE BRILLIANT ZOWIN



SPECIALIZED IN  
PRODUCING VARIOUS  
OFF-HIGHWAY TIRES

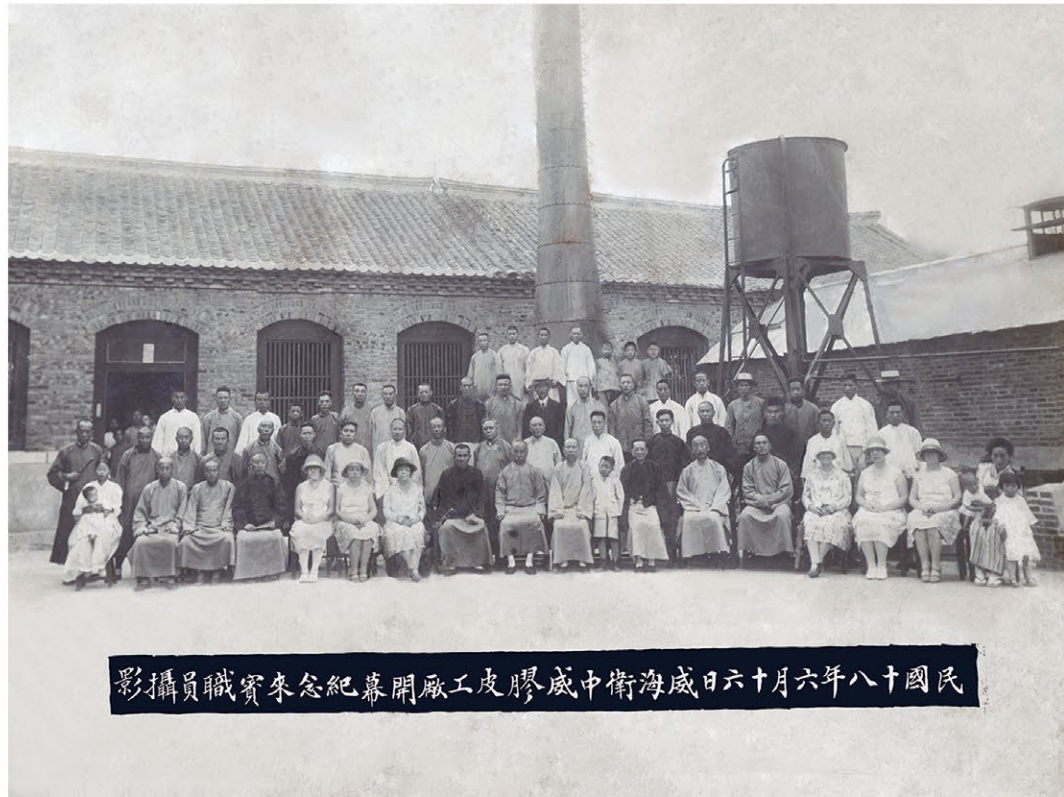

The Factory Opening Ceremony on June 16th ,1929


WEIHAI ZHONGWEI RUBBER CO.,LTD

Add: No. 345 Shichang RD, Weihai City,China

<http://www.zowin.net.cn>



official website

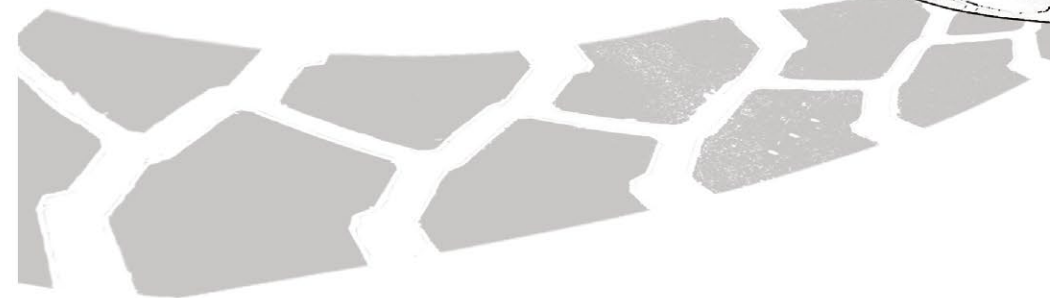

WEIHAI ZHONGWEI RUBBER CO.,LTD

BRIEF INTRODUCTION


WEIHAI ZHONGWEI RUBBER CO.,LTD WAS ESTABLISHED IN 1927, WHICH IS ONE OF THE EARLIEST RUBBER PROCESS FACTORIES IN CHINA.

FOR THE PAST 40 YEARS, THE COMPANY HAS ALWAYS BEEN DEDICATING TO DEVELOP AND RESEARCH SPECIAL TIRES USED IN THE FIELD OF INDUSTRY, CONSTRUCTION, PORT, MINING AND SO ON. AT PRESENT, THE COMPANY HAS A FULL RANGE OF PRODUCTION LINE WITH MORE THAN 1000 SPECIFICATIONS. IN RECENT YEARS, THE PRODUCTS HAVE A HIGH REPUTATION IN WORLD MARKET WITH ITS MANY ADVANTAGES LIKE HIGH PROPERTY ON WEAR-RESISTING, PUNCTURE RESISTANCE, HIGH TEMPERATURE RESISTANCE, HEAVY LOADING ABILITY AND LONG DISTANCE SERVICE WHILE USING IN MINING, PORT, CONSTRUCTION SITE. IN PARTICULAR THE PORT USE TIRES HAVE BEEN CHOSED AS THE HIGH PERFORMANCE-PRICE RATIO TYRE BOTH IN MANY DOMESTIC AND OVERSEA MAJOR PORTS. MOREOVER, SOME INDUSTRIAL TIRES HAVE BEEN SERVICING TO SEVERAL WORLD TOP FAMOUS MERCHINARY MANUFACTURERS AS OEM FOR MANY YEARS.

THE COMPANY HAS A COMPLETE OF QUALITY MANAGEMENT SYSTEM WITH THE MOST ADVANCED TEST AND INSPECTION EQUIPMENTS. THE COMPANY’ S QUALITY POLICY IS TO MEET THE CUSTOMER’ S REQUIRMENT AND EXCEED THE CUSTOMER’ S EXPECTATION. THE COMPANY HAS ACQUIRED ISO9001:2015 CERTIFICATE OF CONFIRMITY OF PRODUCTS QUALITY AND THE CHINA COMPULSORY EXAMINATION CERTIFICATE OF CONFORMITY(CCC). THE TIRE HAS BEEN APPROVED BY THE USA FEDERAL HIGHWAY TRAFFIC SAFTY ADMINISTRATION AND ASSIGNED DOT CODE 260.

IN THE LIGHT OF THE COMPANY MANAGEMENT PHILOSOPHY “BE RESPONSIBLE TO PRODUCTS, BE RESPONSIBLE TO CUSTOMERS, BE RESPONSIBLE TO THE WORLD” , THE COMPANY WILL PERSEVERE IN PROVIDING HIGH QUALITY PRODUCTS AND SERVICE TO CUSTOMERS FROM ALL OVER THE WORLD.

CERTIFICATES

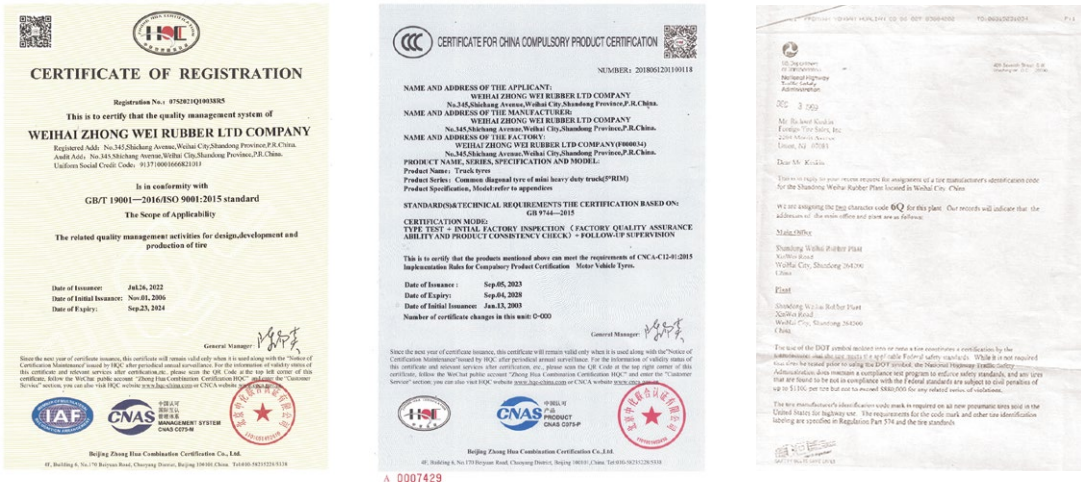

PRODUCT MANUAL

MINING & LOGGING TRUCK TIRES..... 1

UNDERGROUND MINING TIRES..... 5

PORT HANDLING TIRES..... 7

TELEHANDLER TIRES..... 10

EARTHMOVER & LOADER TIRES..... 11

EXCAVATOR TIRES..... 13

DESERT TIRES..... 15

MATERIAL HANDLING TIRES..... 17

GROUND SUPPORT EQUIPMENT TIRES..... 21

BOOM LIFT TIRES..... 23

CONSTRUCTION TIRES..... 24

TRAILER TIRES..... 27

LIGHT & HEAVY DUTY TRUCK TIRES..... 29

MUD ATV TIRES..... 31

AGRICULTURAL TIRES..... 32

BRAND



MINING & LOGGING TRUCK TIRES



E-4A



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|-----------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |           | (kg)     | (kPa)              |              |              |
| 18.00-25 | 40 | E-4A        | TL   | 68       | 13.00/2.5 | 9750     | 700                | 528          | 1684         |
| 18.00-33 | 40 | E-4A        | TL   | 69       | 13.00/2.5 | 11200    | 700                | 509          | 1860         |



E-3 / E-3L



| SIZE     | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|-------|----------|-----------|----------|--------------------|--------------|--------------|
|          |    |             |       |          |           | (kg)     | (kPa)              |              |              |
| 16.00-25 | 36 | E-3         | TT/TL | 36       | 11.25/2.0 | 13600    | 975                | 430          | 1495         |
| 16.00-25 | 36 | E-3L        | TT/TL | 28       | 11.25/2.0 | 13600    | 975                | 430          | 1495         |



GK803 (E-3)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|-----------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |           | (kg)     | (kPa)              |              |              |
| 14.00-25 | 40 | GK803       | TT   | 33       | 10.00/2.0 | 11500    | 1200               | 375          | 1370         |
| 13.00-25 | 32 | GK803       | TT   | 30       | 8.5       | 9500     | 950                | 350          | 1300         |
| 14.00-20 | 24 | GK803       | TT   | 29       | 10.0      | 8500     | 890                | 375          | 1245         |



GK817 (E-4)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|-----------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |           | (kg)     | (kPa)              |              |              |
| 14.00-25 | 40 | GK817       | TT   | 51       | 10.00/2.0 | 11500    | 1200               | 375          | 1370         |
| 12.00-24 | 24 | GK817       | TT   | 45       | 8.5       | 8700     | 1000               | 320          | 1275         |



GK899E (E-3)



| SIZE     | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|-------|----------|-----------|----------|--------------------|--------------|--------------|
|          |    |             |       |          |           | (kg)     | (kPa)              |              |              |
| 14.00-25 | 40 | GK899E      | TT/TL | 33、28    | 10.00/2.0 | 11500    | 1200               | 375          | 1370         |
| 13.00-25 | 36 | GK899E      | TT    | 27       | 8.5       | 10600    | 1200               | 350          | 1300         |



GK899C (E-3)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|-----------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |           | (kg)     | (kPa)              |              |              |
| 14.00-25 | 40 | GK899C      | TT   | 30.5     | 10.00/2.0 | 11500    | 1200               | 375          | 1370         |
| 14.00-24 | 36 | GK899C      | TT   | 28       | 10.0      | 11500    | 1200               | 375          | 1370         |
| 14.00-24 | 32 | GK899C      | TT   | 28       | 10.0      | 10500    | 1000               | 375          | 1370         |
| 14.00-20 | 28 | GK899C      | TT   | 28       | 10.0      | 8500     | 890                | 375          | 1265         |



GK803A (E-3)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 12.00-20 | 18 | GK803A      | TT   | 30       | 8.5     | 3750     | 810                | 315          | 1145         |
| 11.00-20 | 18 | GK803A      | TT   | 26.5     | 8.0     | 3650     | 910                | 293          | 1105         |
| 10.00-20 | 18 | GK803A      | TT   | 28.5     | 7.5     | 3350     | 910                | 278          | 1073         |



## GK899A / GK899A+ (E-4)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 12.00-20 | 24 | GK899A      | TT   | 45       | 8.5     | 8180     | 1000               | 320          | 1143         |
| 11.00-20 | 18 | GK899A      | TT   | 40       | 8.0     | 5480     | 1200               | 300          | 1097         |
| 10.00-20 | 18 | GK899A      | TT   | 40       | 7.5     | 5470     | 890                | 278          | 1055         |
| 8.25-16  | 18 | GK899A      | TT   | 32       | 6.50H   | 4300     | 1000               | 235          | 865          |
| 10.00-20 | 18 | GK899A+     | TT   | 40       | 7.5     | 5470     | 890                | 278          | 1055         |
| 11.00-20 | 18 | GK899A+     | TT   | 33       | 8.0     | 5480     | 1200               | 300          | 1097         |



## GK899 (E-3)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)      | (kPa)              |              |              |
| 12.00-20 | 18 | GK899       | TT   | 26.5     | 8.5     | 3750/3350 | 810/740            | 315          | 1145         |



## GK698 (E-3)



| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)      | (kPa)              |              |              |
| 9.00-20 | 16 | GK698       | TT   | 24       | 7.0     | 2900/2500 | 880/810            | 259          | 1018         |



## GK799 (E-3)



| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)      | (kPa)              |              |              |
| 8.25-16 | 16 | GK799       | TT   | 18       | 6.50H   | 1800/1600 | 730                | 235          | 855          |
| 7.50-16 | 14 | GK799       | TT   | 17       | 6.00G   | 1500/1320 | 730                | 215          | 805          |
| 7.00-16 | 14 | GK799       | TT   | 15.5     | 5.50F   | 1320/1180 | 730                | 200          | 775          |
| 6.50-16 | 12 | GK799       | TT   | 14.5     | 5.50F   | 1060/925  | 630                | 185          | 750          |



## GK918 (E-3)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)      | (kPa)              |              |              |
| 12.00-20 | 20 | GK918       | TT   | 28       | 8.5     | 4000/3450 | 880/810            | 315          | 1145         |
| 11.00-20 | 18 | GK918       | TT   | 30       | 8.0     | 3650/3150 | 910/840            | 293          | 1105         |
| 10.00-20 | 18 | GK918       | TT   | 28       | 7.5     | 3350/2900 | 910/840            | 278          | 1073         |
| 9.00-20  | 18 | GK918       | TT   | 26       | 7.0     | 3000/2650 | 910/840            | 259          | 1038         |



## LY718 (E-3)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)      | (kPa)              |              |              |
| 12.00-24 | 24 | LY718       | TT   | 21       | 8.5     | 4790/4250 | 1000/930           | 315          | 1247         |
| 12.00-24 | 18 | LY718       | TT   | 21       | 8.5     | 4200/3750 | 810/740            | 315          | 1247         |
| 12.00-20 | 20 | LY718       | TT   | 21       | 8.5     | 4000/3450 | 880/810            | 315          | 1145         |
| 12.00-20 | 18 | LY718       | TT   | 21       | 8.5     | 3750/3350 | 810/740            | 315          | 1145         |



## GK718 (E-4)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)      | (kPa)              |              |              |
| 12.00-24 | 24 | GK718       | TT   | 35       | 8.5     | 4790/4250 | 1000/930           | 315          | 1275         |
| 12.00-24 | 20 | GK718       | TT   | 35       | 8.5     | 4500/4000 | 880/810            | 315          | 1275         |



## GK818 (ML-4)



| SIZE     | PR    | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|-------|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|          |       |             |      |          |         | (kg)      | (kPa)              |              |              |
| 12.00-20 | 20/24 | GK818       | TT   | 33       | 8.5     | 4000/3450 | 880/810            | 315          | 1145         |

UNDERGROUND MINING TIRES



ZM722 / C352 (E-3)  
Load Haul Dumper

| SIZE       | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|------------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|            |    |             |      |          |         | (kg)      | (kPa)              |              |              |
| 44X18-20   | 32 | C352        | TL   | 31.5     | 15.00   | 9120/8480 | -/1030             | 478          | 1130         |
| 45X16-20   | 36 | ZM722       | TL   | 47       | 13.00   | 10025     | 1030               | 419          | 1130         |
| 42X13-20   | 32 | ZM722       | TT   | 25       | 9.00    | 9070      | -                  | 330          | 1067         |
| 42X13-20   | 24 | ZM722       | TT   | 25       | 9.00    | 8480      | 1000               | 330          | 1067         |
| 38X16-15   | 32 | ZM722       | TL   | 31       | 11.50   | 7800      | 1000               | 396          | 1000         |
| 14.50L-15  | 32 | ZM722       | TL   | 26       | 11.50   | 6305      | 1030               | 358          | 902          |
| 14.50L-15  | 28 | ZM722       | TL   | 26       | 11.50   | 5580      | 1030               | 358          | 902          |
| 14.50L-15  | 20 | ZM722       | TT   | 26       | 11.50   | 5130      | 900                | 358          | 902          |
| 10.00L-15  | 24 | ZM722       | TT   | 28       | 7.50    | 4875      | 1030               | 284          | 917          |
| 10.00L-15  | 16 | ZM722       | TT   | 28       | 7.50    | 4235      | 790                | 284          | 917          |
| 32X14.5-15 | 24 | ZM722       | TL   | 27       | 11.50   | 4945      | 1030               | 355          | 838          |
| 32X12.5-15 | 24 | ZM722       | TT   | 27       | 9.75    | 4150      | 1000               | 310          | 826          |
| 28X12.5-15 | 28 | ZM722       | TT   | 26       | 9.75    | 3355      | 1030               | 305          | 711          |
| 24X12-12   | 24 | C352        | TL   | 20       | 9.00    | 3130      | 1030               | 295          | 625          |
| 15L-10     | 24 | ZM722       | TT   | 24       | 13.00   | 3470      | 860                | 366          | 704          |

Fill 15L-10—27X15-10 14.50L-15—35X15-15—380/70-15 10.00L-15—36X11-15 32X12.5-15—32X12.1-15 32X14.5-15—32X15-15 28X12.5-15—355/45-15



S8803 (E-3)  
Load Haul Dumper

| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 50X20-20 | 36 | S8803       | TL   | 33       | 15.00   | 12940    | 1030               | 495          | 1270         |
| 14.00-20 | 32 | S8803       | TT   | 29       | 10.00   | 10025    | -                  | 375          | 1245         |
| 14.00-20 | 28 | S8803       | TT   | 29       | 10.00   | 9250     | 965                | 375          | 1245         |

Fill



L-4S  
Load Haul Dumper

| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|-----------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |           | (kg)     | (kPa)              |              |              |
| 18.00-25 | 32 | L-4S        | TL   | 58       | 13.00/2.5 | 15000    | 750                | 526          | 1673         |
| 14.00-24 | 24 | L-4S        | TT   | 45.5     | 10.00     | 9500     | 850                | 375          | 1420         |
| 10.00-20 | 16 | L-4S        | TT   | 26       | 7.5       | 5090     | 790                | 278          | 1073         |

Cut Protected



L-5S / L-5SA / L-5SL  
Load Haul Dumper

| SIZE     | PR | PATTERN NO.      | TYPE  | T.D.(mm)     | STD.RIM   | MAX LOAD    | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|------------------|-------|--------------|-----------|-------------|--------------------|--------------|--------------|
|          |    |                  |       |              |           | (kg)        | (kPa)              |              |              |
| 29.5-29  | 40 | L-5S             | TL    | 110          | 25.00/3.5 | 23600       | 625                | 750          | 2025         |
| 29.5-25  | 34 | L-5S             | TL    | 110          | 25.00/3.5 | 19800       | 525                | 750          | 1920         |
| 26.5-25  | 36 | L-5S/L-5SL       | TL    | 100/80       | 22.00/3.0 | 18500       | 625                | 675          | 1800         |
| 18.00-25 | 32 | L-5S             | TL    | 85           | 13.00/2.5 | 15000       | 750                | 526          | 1673         |
| 17.5-25  | 24 | L-5S             | TT/TL | 82           | 14.00/1.5 | 9000        | 675                | 445          | 1400         |
| 17.5-25  | 20 | L-5S/L-5SL/L-5SA | TT/TL | 82/63.5/45.5 | 14.00/1.5 | 8250        | 575                | 445          | 1400         |
| 14.00-24 | 28 | L-5S/L-5SL       | TT    | 77/63.5      | 10.00     | 13500/10000 | 1000/925           | 386/375      | 1417/1420    |
| 12.00-24 | 24 | L-5S/L-5SL       | TT    | 55/47        | 8.5       | 10250       | 1000               | 333          | 1300         |
| 12.00-20 | 28 | L-5S             | TT    | 67           | 8.5       | 8620        | 1030               | 340          | 1173         |
| 12.00-20 | 20 | L-5SA            | TT    | 57           | 8.5       | 6325        | 900                | 315          | 1145         |
| 10.00-20 | 18 | L-5S             | TT    | 58           | 7.5       | 7255        | 1000               | 300          | 1097         |
| 8.25-15  | 24 | L-5S             | TT    | 52           | 6.5       | 6070        | 1030               | 260          | 864          |

Cut Protected



S8817 (L-5)  
Articulated Dump Truck Load Haul Dumper

| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 12.00-20 | 28 | S8817       | TT   | 61       | 8.5     | 8620     | 1030               | 315          | 1145         |
| 12.00-20 | 24 | S8817       | TT   | 61       | 8.5     | 8180     | 1000               | 315          | 1145         |

PORT HANDLING TIRES



E-4



| SIZE     | PR    | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|-------|-------------|-------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |       |             |       |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 18.00-25 | 40/44 | E-4         | TL    | 69       | 13.00/2.5 | 1150                     | 30600                               | 27200 | 24650 | 22950  | 22100  | 21590  | 21250  | 21080  | 526       | 1675      |
| 16.00-25 | 36    | E-4         | TL    | 62       | 11.25/2.0 | 1150                     | 24500                               | 21800 | 19700 | 18400  | 17700  | 17300  | 17000  | 16350  | 432       | 1548      |
| 16.00-25 | 32    | E-4         | TL    | 62       | 11.25/2.0 | 1000                     | 22100                               | 19650 | 17800 | 16600  | 16000  | 15600  | 15350  | 15195  | 432       | 1548      |
| 16.00-25 | 28    | E-4         | TL    | 62       | 11.25/2.0 | 900                      | 20700                               | 18400 | 16675 | 15525  | 14950  | 14605  | 14375  | 14260  | 432       | 1548      |
| 14.00-25 | 28    | E-4         | TT/TL | 57       | 10.00/1.5 | 1000                     | 18000                               | 16000 | 14500 | 13500  | 13000  | 12700  | 12500  | 12400  | 386       | 1417      |
| 14.00-24 | 32    | E-4         | TL    | 57       | 10.00     | 1100                     | 19605                               | 17430 | 15845 | 14700  | 14160  | 13820  | 13600  | 13460  | 386       | 1417      |
| 14.00-24 | 28    | E-4         | TT/TL | 57       | 10.00     | 1000                     | 18000                               | 16000 | 14500 | 13500  | 13000  | 12700  | 12500  | 12400  | 386       | 1417      |
| 12.00-24 | 24    | E-4         | TT    | 54       | 8.5       | 1000                     | 13600                               | 12150 | 11000 | 10250  | 9850   | 9650   | 9500   | 9400   | 333       | 1300      |
| 12.00-20 | 24    | E-4         | TT    | 45       | 8.5       | 1000                     | 13000                               | 11600 | 10510 | 9800   | 9440   | 9230   | 8250   | 8180   | 340       | 1173      |
| 10.00-20 | 18    | E-4         | TT    | 40       | 7.5       | 1000                     | 9630                                | 8560  | 7780  | 7255   | 6990   | 6830   | 5520   | 5480   | 300       | 1097      |



IND-4



| SIZE     | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|----|-------------|-------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |    |             |       |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 18.00-25 | 40 | IND-4       | TL    | 56       | 13.00/2.5 | 1150                     | 30600                               | 27200 | 24650 | 22950  | 22100  | 21590  | 21250  | 21080  | 515       | 1675      |
| 14.00-24 | 28 | IND-4       | TT/TL | 51       | 10.00     | 1000                     | 18000                               | 16000 | 14500 | 13500  | 13000  | 12700  | 12500  | 12400  | 375       | 1370      |
| 12.00-24 | 24 | IND-4       | TT    | 45       | 8.5       | 1000                     | 13600                               | 12150 | 11000 | 10250  | 9850   | 9650   | 9500   | 9400   | 315       | 1275      |



IND-4A



| SIZE     | PR    | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|-------|-------------|------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |       |             |      |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 18.00-25 | 40/44 | IND-4A      | TL   | 58       | 13.00/2.5 | 1150                     | 30600                               | 27200 | 24650 | 22950  | 22100  | 21590  | 21250  | 21080  | 515       | 1675      |



L-4S



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|----|-------------|------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |    |             |      |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 18.00-25 | 40 | L-4S        | TL   | 58       | 13.00/2.5 | 1150                     | 30600                               | 27200 | 24650 | 22950  | 22100  | 21590  | 21250  | 21080  | 526       | 1675      |
| 18.00-33 | 40 | L-4S        | TL   | 58       | 13.00/2.5 | 1150                     | 35600                               | 31670 | 28700 | 26700  | 25710  | 25120  | 24700  | 24500  | 509       | 1860      |



L-5S (Special)



| SIZE     | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|----|-------------|-------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |    |             |       |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 21.00-25 | 40 | L-5S        | TL    | 97       | 15.00/3.0 | 1150                     | 36386                               | 32343 | 29311 | 27290  | 26279  | 25672  | 25268  | 25066  | 617       | 1798      |
| 18.00-25 | 40 | L-5S        | TL    | 85       | 13.00/2.5 | 1150                     | 30600                               | 27200 | 24650 | 22950  | 22100  | 21590  | 21250  | 21080  | 538       | 1675      |
| 14.00-25 | 28 | L-5S        | TT/TL | 77       | 10.00     | 1000                     | 18000                               | 16000 | 14500 | 13500  | 13000  | 12700  | 12500  | 12400  | 386       | 1417      |
| 14.00-24 | 28 | L-5S        | TT/TL | 77       | 10.00     | 1000                     | 18000                               | 16000 | 14500 | 13500  | 13000  | 12700  | 12500  | 12400  | 386       | 1417      |
| 12.00-24 | 24 | L-5S        | TT    | 55       | 8.5       | 1000                     | 13600                               | 12150 | 11000 | 10250  | 9850   | 9650   | 9500   | 9400   | 333       | 1300      |
| 12.00-20 | 28 | L-5S        | TT    | 67       | 8.5       | 1030                     | 13440                               | 12040 | 10975 | 10250  | 9910   | 9690   | 9520   | 9400   | 330       | 1173      |
| 10.00-20 | 18 | L-5S        | TT    | 58       | 7.5       | 1000                     | 9630                                | 8560  | 7780  | 7255   | 6990   | 6830   | 5520   | 5480   | 300       | 1097      |



E-4A



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|----|-------------|------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |    |             |      |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 18.00-33 | 40 | E-4A        | TL   | 69       | 13.00/2.5 | 1150                     | 35600                               | 31670 | 28700 | 26700  | 25710  | 25120  | 24700  | 24500  | 509       | 1860      |
| 18.00-25 | 40 | E-4A        | TL   | 68       | 13.00/2.5 | 1150                     | 30600                               | 27200 | 24650 | 22950  | 22100  | 21590  | 21250  | 21080  | 528       | 1684      |



## E-3A



| SIZE     | PR    | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|-------|-------------|------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |       |             |      |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 21.00-35 | 44    | E-3A        | TL   | 42       | 15.00/3.0 | 1250                     | 45900                               | 40800 | 36790 | 34420  | 33150  | 32380  | 31870  | 30980  | 570       | 2005      |
| 21.00-25 | 48    | E-3A        | TL   | 42       | 15.00/3.0 | 1250                     | 41920                               | 37250 | 33610 | 32030  | 30040  | 29310  | 28850  | 28620  | 570       | 1750      |
| 21.00-25 | 44    | E-3A        | TL   | 42       | 15.00/3.0 | 1250                     | 39580                               | 35180 | 31860 | 29950  | 28480  | 27800  | 27360  | 27140  | 570       | 1750      |
| 21.00-25 | 42    | E-3A        | TL   | 42       | 15.00/3.0 | 1150                     | 37370                               | 33220 | 30200 | 28000  | 27000  | 26360  | 25940  | 25730  | 570       | 1750      |
| 18.00-25 | 44/48 | E-3A        | TL   | 41       | 13.00/2.5 | 1250                     | 32290                               | 28700 | 25990 | 24110  | 23240  | 22700  | 22340  | 22160  | 510       | 1636      |
| 18.00-25 | 40    | E-3A        | TL   | 41       | 13.00/2.5 | 1150                     | 30600                               | 27200 | 24650 | 22950  | 22100  | 21590  | 21250  | 21080  | 510       | 1636      |



## E-3V



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|----|-------------|------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |    |             |      |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 21.00-25 | 44 | E-3V        | TL   | 42       | 15.00/3.0 | 1250                     | 39580                               | 35180 | 31860 | 29950  | 28480  | 27800  | 27360  | 27140  | 570       | 1750      |
| 21.00-25 | 42 | E-3V        | TL   | 42       | 15.00/3.0 | 1150                     | 37370                               | 33220 | 30200 | 28000  | 27000  | 26360  | 25940  | 25730  | 570       | 1750      |



## E-3L (IND-3)



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|----|-------------|------|----------|-----------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |    |             |      |          |           |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 21.00-25 | 48 | E-3L        | TL   | 32       | 15.00/3.0 | 1250                     | 39580                               | 35180 | 31860 | 29950  | 28480  | 27800  | 27360  | 27140  | 570       | 1750      |
| 16.00-25 | 36 | E-3L        | TL   | 28       | 11.25/2.0 | 1150                     | 24500                               | 21800 | 19700 | 18400  | 17700  | 17300  | 17000  | 16350  | 430       | 1495      |



## GK899C (IND-3)



| SIZE     | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM | INFLATION PRESSURE (kPa) | LOAD CAPACITY AT VARIOUS SPEED (kg) |       |       |        |        |        |        |        | S.W. (mm) | O.D. (mm) |
|----------|----|-------------|-------|----------|---------|--------------------------|-------------------------------------|-------|-------|--------|--------|--------|--------|--------|-----------|-----------|
|          |    |             |       |          |         |                          | 0km/h                               | Creep | 5km/h | 10km/h | 15km/h | 20km/h | 25km/h | 30km/h |           |           |
| 14.00-24 | 32 | GK899C      | TT/TL | 28       | 10.00   | 1100                     | 19605                               | 17430 | 15845 | 14700  | 14160  | 13820  | 13600  | 13460  | 375       | 1370      |

## TELEHANDLER TIRES



## E-3C / L-3C



| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W. (mm) | O.D. (mm) |
|---------|----|-------------|------|----------|-----------|----------|--------------------|-----------|-----------|
|         |    |             |      |          |           | (kg)     | (kPa)              |           |           |
| 15.5-25 | 16 | E-3C/L-3C   | TL   | 28.5     | 12.00/1.3 | 5600     | 540                | 435       | 1325      |



## G-2 / L-2



| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W. (mm) | O.D. (mm) |
|----------|----|-------------|------|----------|---------|----------|--------------------|-----------|-----------|
|          |    |             |      |          |         | (kg)     | (kPa)              |           |           |
| 14.00-24 | 16 | G-2/L-2     | TL   | 25.4     | 10.00   | 7300     | 550                | 393       | 1346      |
| 14.00-24 | 12 | G-2/L-2     | TL   | 25.4     | 10.00   | 6305     | 430                | 393       | 1346      |
| 13.00-24 | 16 | G-2/L-2     | TL   | 25.4     | 8.00    | 6485     | 600                | 358       | 1277      |
| 13.00-24 | 12 | G-2/L-2     | TL   | 25.4     | 8.00    | 5580     | 450                | 358       | 1277      |



## R-4



| SIZE      | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W. (mm) | O.D. (mm) |
|-----------|----|-------------|------|----------|---------|----------|--------------------|-----------|-----------|
|           |    |             |      |          |         | (kg)     | (kPa)              |           |           |
| 400/80-24 | 24 | R-4         | TL   | 29       | DW13    | 5700     | 750                | 404       | 1250      |
| 400/80-24 | 20 | R-4         | TL   | 29       | DW13    | 4750     | 500                | 404       | 1250      |

400/80-24 — 15.5/80-24

# EARTHMOVER & LOADER TIRES



## E-4C



Wheel Loader

| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|-----------|----------|--------------------|--------------|--------------|
|         |    |             |      |          |           | (kg)     | (kPa)              |              |              |
| 29.5-25 | 44 | E-4C        | TL   | 48       | 25.00/3.5 | 31500    | 1000               | 750          | 1920         |
| 29.5-25 | 38 | E-4C        | TL   | 48       | 25.00/3.5 | 28000    | 950                | 750          | 1920         |
| 29.5-25 | 34 | E-4C        | TL   | 48       | 25.00/3.5 | 19800    | 525                | 750          | 1920         |
| 29.5-25 | 28 | E-4C        | TL   | 48       | 25.00/3.5 | 17500    | 425                | 750          | 1920         |



## L-4C



Wheel Loader

| SIZE    | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|-------|----------|-----------|----------|--------------------|--------------|--------------|
|         |    |             |       |          |           | (kg)     | (kPa)              |              |              |
| 26.5-25 | 36 | L-4C        | TL    | 54       | 22.00/3.0 | 18000    | 625                | 675          | 1800         |
| 23.5-25 | 32 | L-4C        | TT/TL | 45       | 19.50/2.5 | 13600    | 550                | 595          | 1615         |
| 23.5-25 | 24 | L-4C        | TT/TL | 45       | 19.50/2.5 | 12495    | 475                | 595          | 1615         |
| 23.5-25 | 20 | L-4C        | TT    | 45       | 19.50/2.5 | 10900    | 375                | 595          | 1615         |



## E-4 / L-4



Wheel Loader

| SIZE      | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-----------|----|-------------|------|----------|-----------|----------|--------------------|--------------|--------------|
|           |    |             |      |          |           | (kg)     | (kPa)              |              |              |
| ★ 29.5-29 | 46 | E-4/L-4     | TL   | 45       | 25.00/3.5 | 25750    | 1000               | 750          | 1975         |
| 29.5-25   | 34 | E-4/L-4     | TL   | 64       | 25.00/3.5 | 19800    | 525                | 750          | 1920         |
| 26.5-25   | 44 | E-4/L-4     | TL   | 54       | 22.00/3.0 | 22000    | 750                | 675          | 1800         |
| 26.5-25   | 36 | E-4/L-4     | TL   | 54       | 22.00/3.0 | 18000    | 625                | 675          | 1800         |

★ Super Carrier Service



## E-3 / L-3 (E-3L)



Wheel Loader

| SIZE       | PR | PATTERN NO.     | TYPE  | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|------------|----|-----------------|-------|----------|-----------|----------|--------------------|--------------|--------------|
|            |    |                 |       |          |           | (kg)     | (kPa)              |              |              |
| ★ 26.5-25  | 44 | E-3/L-3         | TT/TL | 38       | 22.00/3.0 | 26000    | 1000               | 675          | 1750         |
| 26.5-25    | 32 | E-3/L-3         | TT/TL | 38       | 22.00/3.0 | 17000    | 550                | 675          | 1750         |
| 26.5-25    | 28 | E-3/L-3         | TT/TL | 38       | 22.00/3.0 | 15500    | 475                | 675          | 1750         |
| 26.5-25    | 20 | E-3/L-3         | TT/TL | 38       | 22.00/3.0 | 13200    | 350                | 675          | 1750         |
| 23.5-25    | 32 | E-3/L-3         | TT/TL | 33       | 19.50/2.5 | 13600    | 550                | 595          | 1615         |
| 23.5-25    | 24 | E-3/L-3         | TT/TL | 33       | 19.50/2.5 | 12500    | 475                | 595          | 1615         |
| 23.5-25    | 20 | E-3/L-3         | TT/TL | 33       | 19.50/2.5 | 10900    | 375                | 595          | 1615         |
| 23.5-25    | 18 | E-3/L-3         | TT    | 33       | 19.50/2.5 | 10300    | 350                | 595          | 1615         |
| 23.5-25    | 16 | E-3/L-3         | TT    | 33       | 19.50/2.5 | 9500     | 300                | 595          | 1615         |
| 20.5-25    | 20 | E-3/L-3         | TT/TL | 29       | 17.00/2.0 | 9500     | 450                | 520          | 1490         |
| 20.5-25    | 16 | E-3/L-3         | TT    | 29       | 17.00/2.0 | 7730     | 345                | 520          | 1490         |
| 17.5-25    | 24 | E-3/L-3         | TT    | 29       | 14.00/1.5 | 9000     | 675                | 445          | 1350         |
| 17.5-25    | 20 | E-3/L-3         | TL    | 29       | 14.00/1.5 | 8250     | 575                | 445          | 1350         |
| 17.5-25    | 16 | E-3/L-3<br>E-3L | TT    | 26/29    | 14.00/1.5 | 7300     | 475                | 445          | 1350         |
| 16/70-24   | 24 | E-3/L-3         | TT    | 24.5     | 13.00     | 8000     | 900                | 410          | 1175         |
| 16/70-24   | 14 | E-3/L-3         | TT    | 24.5     | 13.00     | 5600     | 450                | 410          | 1175         |
| 16/70-20   | 14 | E-3/L-3         | TT    | 24.5     | 13.00     | 5150     | 450                | 410          | 1075         |
| 20.5/70-16 | 14 | E-3/L-3         | TT    | 18       | 10.00     | 1600     | 280                | 320          | 900          |
| 12.00-16   | 14 | E-3/L-3         | TT    | 16.5     | 6.50H     | 1650     | 420                | 250          | 900          |

★ Super Carrier Service



## L-5



Wheel Loader

| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|-----------|----------|--------------------|--------------|--------------|
|         |    |             |      |          |           | (kg)     | (kPa)              |              |              |
| 29.5-29 | 40 | L-5         | TL   | 105      | 25.00/3.5 | 23600    | 625                | 750          | 2025         |
| 29.5-25 | 40 | L-5         | TL   | 105      | 25.00/3.5 | 225000   | 625                | 750          | 1920         |
| 26.5-25 | 36 | L-5         | TL   | 97       | 22.00/3.0 | 18500    | 625                | 675          | 1800         |

# EXCAVATOR TIRES



R-4C



Excavator

| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD<br>(kg) | INFLATION PRESSURE<br>(kPa) | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|------------------|-----------------------------|--------------|--------------|
| 8.25-16 | 16 | R-4C        | TT   | 20       | 6.50H   | 1800             | 730                         | 235          | 835          |



E-3B



Excavator

| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD<br>(kg) | INFLATION PRESSURE<br>(kPa) | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|------------------|-----------------------------|--------------|--------------|
| 9.00-20 | 14 | E-3B        | TT   | 25       | 7.0     | 2500             | 700                         | 259          | 1038         |



E-3S



Excavator

| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD<br>(kg) | INFLATION PRESSURE<br>(kPa) | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|------------------|-----------------------------|--------------|--------------|
| 10.00-20 | 18 | E-3S        | TT   | 28.5     | 7.5     | 5470             | 890                         | 278          | 1073         |
| 9.00-20  | 16 | E-3S        | TT   | 28.5     | 7.0     | 4000             | 760                         | 255          | 1015         |



E-3F



Excavator

| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD<br>(kg) | INFLATION PRESSURE<br>(kPa) | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|------------------|-----------------------------|--------------|--------------|
| 9.00-20 | 18 | E-3F        | TT   | 28.5     | 7.0     | 4360             | 840                         | 255          | 1015         |



E-3D



Excavator

| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD<br>(kg) | INFLATION PRESSURE<br>(kPa) | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|------------------|-----------------------------|--------------|--------------|
| 8.25-16 | 16 | E-3D        | TT   | 20       | 6.50H   | 1800             | 730                         | 235          | 835          |
| 7.50-16 | 16 | E-3D        | TT   | 20       | 6.00G   | 1250             | 500                         | 215          | 815          |



E-3H



Excavator

| SIZE      | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD<br>(kg) | INFLATION PRESSURE<br>(kPa) | S.W.<br>(mm) | O.D.<br>(mm) |
|-----------|----|-------------|------|----------|---------|------------------|-----------------------------|--------------|--------------|
| 195/85-20 | 12 | E-3H        | TT   | 20       | 5.50H   | 1550/1360        | 530                         | 195          | 850          |



## DESERT TIRES



E-7 / E-7A



| SIZE        | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 66X44.00-25 | 32 | E-7A        | TL   | 16       | 36.0TH  | 11185    | 480                | 1118         | 1702         |
| 66X44.00-25 | 24 | E-7         | TL   | 10       | 36.0TH  | 10000    | 380                | 1118         | 1702         |
| 66X44.00-25 | 20 | E-7         | TL   | 10       | 36.0TH  | 7020     | 345                | 1118         | 1702         |



E-2



| SIZE        | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 66X43.00-25 | 24 | E-2         | TL   | 47       | 36.0TH  | 10000    | 380                | 1054         | 1650         |
| 66X43.00-25 | 20 | E-2         | TL   | 47       | 36.0TH  | 8800     | 345                | 1054         | 1650         |



F-3



| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 9.00-17 | 8  | F-3         | TL   | 10       | 7J      | 1000     | 245                | 230          | 910          |
| 9.00-16 | 8  | F-3         | TL   | 10       | 6.50H   | 975      | 245                | 255          | 860          |



E-7



| SIZE  | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------|----|-------------|-------|----------|---------|----------|--------------------|--------------|--------------|
|       |    |             |       |          |         | (kg)     | (kPa)              |              |              |
| 22-20 | 14 | E-7         | TL    | 15       | 17.00   | 4125     | 280                | 555          | 1075         |
| 20-20 | 16 | E-7         | TL    | 15       | 14.00T  | 6000     | 360                | 505          | 1180         |
| 18-20 | 14 | E-7         | TL/TT | 15       | 14.00T  | 4625     | 360                | 455          | 1090         |



# MATERIAL HANDLING TIRES



ZM806 (IND-4)



| SIZE          | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|               |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 9.00-20RG     | 18 | ZM806       | TT   | 36       | 7.0     | 6020     | 960                | 259          | 1018         |
| 8.25-20RG     | 18 | ZM806       | TT   | 32       | 6.5     | 5300     | 950                | 235          | 974          |
| 7.50-16RG     | 16 | ZM806       | TT   | 28       | 6.00G   | 5440     | 1030               | 215          | 805          |
| 300-15RG      | 22 | ZM806       | TT   | 29.5     | 8.0     | 7155     | 1030               | 300          | 840          |
| 250-15RG      | 20 | ZM806       | TT   | 28.5     | 7.5     | 4580     | 1030               | 250          | 735          |
| 8.25-15RG     | 16 | ZM806       | TT   | 32       | 6.5     | 4050     | 925                | 235          | 840          |
| 28X9-15RG     | 16 | ZM806       | TT   | 27.5     | 7.0     | 3115     | 1000               | 220          | 710          |
| 7.00-15RG     | 14 | ZM806       | TT   | 33       | 5.5     | 3140     | 1000               | 200          | 750          |
| 7.00-12RG     | 14 | ZM806A      | TT   | 32.5     | 5.00S   | 2590     | 1000               | 190          | 685          |
| 6.50-10RG     | 12 | ZM806A      | TT   | 31.5     | 5.00F   | 1895     | 1000               | 175          | 600          |
| 6.50-10RG     | 12 | ZM806C      | TT   | 24       | 5.00F   | 1895     | 1000               | 175          | 590          |
| 6.00/6.90-9RG | 12 | ZM806       | TT   | 26       | 4.00E   | 1675     | 1030               | 160          | 540          |
| 5.00/5.70-8RG | 10 | ZM806       | TT   | 23       | 3.50D   | 1150     | 1000               | 137          | 470          |



ZM722A (E-4A)



| SIZE     | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM   | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|-------|----------|-----------|----------|--------------------|--------------|--------------|
|          |    |             |       |          |           | (kg)     | (kPa)              |              |              |
| 14.00-25 | 28 | ZM722A      | TT    | 40       | 10.00/1.5 | 13500    | 1000               | 375          | 1370         |
| 14.00-24 | 28 | ZM722A      | TT/TL | 40       | 10.0      | 13500    | 1000               | 375          | 1370         |
| 12.00-20 | 24 | ZM722A      | TT    | 45       | 8.5       | 9800     | 1000               | 320          | 1143         |



ZM722 (IND-3)



ZM722L (IND-3)



| SIZE        | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 12.00-20    | 28 | ZM722L      | TT   | 25       | 8.5     | 8525     | 1030               | 315          | 1145         |
| 9.00-20     | 16 | ZM722       | TT   | 22.7     | 7.0     | 5595     | 860                | 259          | 1018         |
| 7.50-16     | 16 | ZM722       | TT   | 17       | 6.00G   | 5440     | 1030               | 215          | 820          |
| 300-15      | 20 | ZM722       | TT   | 21       | 8.0     | 5940     | 930                | 300          | 840          |
| 250-15      | 18 | ZM722       | TT   | 20.5     | 7.5     | 4110     | 1030               | 250          | 735          |
| 8.25-15     | 16 | ZM722       | TT   | 18.5     | 6.5     | 4050     | 925                | 235          | 840          |
| 28X9-15     | 14 | ZM722C      | TT   | 16.5     | 7.0     | 3050     | 970                | 220          | 710          |
| 7.00-15     | 14 | ZM722       | TT   | 17       | 5.5     | 3140     | 1000               | 199          | 731          |
| 8.25-12     | 12 | ZM722       | TT   | 16.8     | 5.00S   | 2000     | 700                | 210          | 728          |
| 7.00-12     | 14 | ZM722       | TT   | 18       | 5.00S   | 2590     | 1000               | 190          | 676          |
| 7.50-10     | 16 | ZM722       | TT   | 22       | 5.50F   | 2925     | 1030               | 203          | 647          |
| 6.50-10     | 10 | ZM722       | TT   | 16       | 5.00F   | 1655     | 790                | 175          | 590          |
| 6.50-10     | 10 | ZM722C      | TT   | 15       | 5.00F   | 1655     | 790                | 175          | 590          |
| 6.00/6.90-9 | 10 | ZM722       | TT   | 17       | 4.00E   | 1505     | 860                | 160          | 540          |
| 18X7-8      | 14 | ZM722       | TT   | 13       | 4.33R   | 1505     | 970                | 173          | 465          |
| 5.00-8      | 8  | ZM722       | TT   | 14       | 3.50D   | 1000     | 790                | 137          | 470          |



ZM712 (IND-3)

| SIZE      | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-----------|----|-------------|-------|----------|---------|----------|--------------------|--------------|--------------|
|           |    |             |       |          |         | (kg)     | (kPa)              |              |              |
| 355/65-15 | 28 | ZM712       | TT/TL | 23       | 9.75    | 6000     | 1000               | 330          | 841          |

SPMT SERVICE



## SR722



| SIZE          | PATTERN NO. | TYPE  | T.D.(mm) | STD. RIM | MAX LOAD |      | S.W. (mm) | O.D. (mm) |
|---------------|-------------|-------|----------|----------|----------|------|-----------|-----------|
|               |             |       |          |          | (kg)     | (kg) |           |           |
| 8.25-15/6.5   | SR722       | SOLID | 34.5     | 6.5      | 5085     | 3910 | 236       | 847       |
| 28X9-15/7.0   | SR722       |       | 32       | 7.0      | 4060     | 3125 | 225       | 706       |
| 6.50-10/5.00  | SR722       |       | 25       | 5.00F    | 2715     | 2090 | 178       | 597       |
| 15X4.5-8/3.00 | SR722       |       | 16       | 3.00     | 1005     | 775  | 114       | 380       |



## SR806



| SIZE           | PATTERN NO. | TYPE  | T.D.(mm) | STD. RIM | MAX LOAD |      | S.W. (mm) | O.D. (mm) |
|----------------|-------------|-------|----------|----------|----------|------|-----------|-----------|
|                |             |       |          |          | (kg)     | (kg) |           |           |
| 8.25-20/6.5    | SR806       | SOLID | 35       | 6.5      | 5165     | 4305 | 236       | 992       |
| 300-15/8.0     | SR806       |       | 33       | 8.0      | 6895     | 5305 | 300       | 838       |
| 250-15/7.0     | SR806       |       | 31       | 7.0      | 5220     | 2225 | 250       | 735       |
| 700-15/5.50    | SR806       |       | 29       | 5.50     | 3700     | 2845 | 204       | 759       |
| 27X10-12/8.00  | SR806       |       | 29       | 8.00G    | 4595     | 3535 | 261       | 683       |
| 7.00-12/5.00   | SR806       |       | 27       | 5.00S    | 3105     | 2390 | 192       | 683       |
| 23X9-10/6.50   | SR806       |       | 26       | 6.50F    | 3730     | 2870 | 225       | 595       |
| 200/50-10/6.50 | SR806       |       | 19       | 6.50F    | 2910     | 2240 | 196       | 458       |
| 21X8-9/6.00    | SR806       |       | 19       | 6.00E    | 2890     | 2225 | 207       | 535       |
| 140/55-9/4.00  | SR806       |       | 14       | 4.00E    | 1380     | 1060 | 147       | 375       |
| 6.00-9/4.00    | SR806       |       | 24       | 4.00E    | 1975     | 1520 | 160       | 545       |
| 5.00-8/3.00    | SR806       |       | 17       | 3.00D    | 1255     | 865  | 146       | 469       |
| 4.00-8/3.00    | SR806       |       | 22       | 3.00D    | 1090     | 840  | 102       | 408       |
| 18X7-8/4.33    | SR806       |       | 17       | 4.33R    | 2430     | 1870 | 170       | 457       |
| 16X6-8/4.33    | SR806       |       | 17       | 4.33R    | 1545     | 1190 | 160       | 416       |



## SR77



| SIZE         | PATTERN NO. | TYPE  | T.D.(mm) | STD. RIM | MAX LOAD |      | S.W. (mm) | O.D. (mm) |
|--------------|-------------|-------|----------|----------|----------|------|-----------|-----------|
|              |             |       |          |          | (kg)     | (kg) |           |           |
| 28X9-15/7.0  | SR77        | SOLID | 26       | 7.0      | 4060     | 3125 | 210       | 694       |
| 7.00-12/5.00 | SR77        |       | 25       | 5.00S    | 3105     | 2390 | 162       | 650       |
| 6.50-10/5.00 | SR77        |       | 24       | 5.00F    | 2715     | 2090 | 150       | 571       |
| 6.00-9/4.00  | SR77        |       | 24       | 4.00E    | 1975     | 1520 | 137       | 524       |
| 5.00-8/3.00  | SR77        |       | 24       | 3.00D    | 1255     | 965  | 114       | 455       |



## SR817



| SIZE         | PATTERN NO. | TYPE  | T.D.(mm) | STD. RIM | MAX LOAD |      | S.W. (mm) | O.D. (mm) |
|--------------|-------------|-------|----------|----------|----------|------|-----------|-----------|
|              |             |       |          |          | (kg)     | (kg) |           |           |
| 12.00-20/8.5 | SR817       | SOLID | 31       | 8.5      | 8920     | 7435 | 280       | 1075      |
| 11.00-20/8.0 | SR817       |       | 31       | 8.0      | 7715     | 6430 | 280       | 1075      |
| 10.00-20/7.5 | SR817       |       | 31       | 7.5      | 7075     | 5895 | 260       | 1055      |



## SR328



| SIZE         | PATTERN NO. | TYPE  | T.D.(mm) | STD. RIM | MAX LOAD |      | S.W. (mm) | O.D. (mm) |
|--------------|-------------|-------|----------|----------|----------|------|-----------|-----------|
|              |             |       |          |          | (kg)     | (kg) |           |           |
| 23X10-12/8.0 | SR328       | SOLID | 20       | 8.0      | 4450     | 3425 | 261       | 595       |
| 4.00-8/3.0   | SR108       |       | 4        | 3.0D     | 1090     | 840  | 102       | 405       |

## GROUND SUPPORT EQUIPMENT TIRES



S8802



| SIZE   | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|--------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|        |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 185-14 | 10 | S8802       | TL   | 20       | 5.50F   | 1120     | 655                | 200          | 655          |
| 165-13 | 10 | S8802       | TL   | 21.5     | 4 1/2J  | 1050     | 655                | 177          | 608          |



S8804



| SIZE        | PR | PATTERN NO. | TYPE  | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|-------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |       |          |         | (kg)     | (kPa)              |              |              |
| 9.50-16.5   | 10 | S8804       | TL    | 18       | 6.75    | 1440     | 550                | 241          | 780          |
| 8.75-16.5   | 10 | S8804       | TL    | 19       | 6.75    | 1410     | 520                | 225          | 772          |
| 8.00-16.5   | 8  | S8804       | TL    | 14       | 6.00    | 1410     | 450                | 203          | 726          |
| 225/75D16   | 10 | S8804       | TL    | 19       | 6.00    | 1605     | 790                | 224          | 750          |
| 225/75-15   | 10 | S8804       | TL    | 19       | 6.00    | 1635     | 725                | 224          | 750          |
| 7.50-10     | 16 | S8804       | TT    | 16       | 5.50F   | 2925     | 1030               | 203          | 647          |
| 6.50-10     | 12 | S8804       | TT    | 18       | 5.00F   | 1150     | 970                | 200          | 615          |
| 6.90-9      | 10 | S8804       | TT/TL | 18       | 4.00E   | 1280     | 860                | 175          | 558          |
| 6.90-9      | 8  | S8804       | TL    | 13       | 4.00E   | 1125     | 690                | 175          | 558          |
| 5.70/5.00-8 | 8  | S8804       | TL    | 12.5     | 3.75    | 830      | 790                | 146          | 480          |
| 4.80/4.00-8 | 8  | S8804       | TL    | 13       | 3.75    | 525      | 790                | 124          | 432          |

225/75-15—28X8-15



S8805 (M+S)



| SIZE      | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-----------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|           |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 8.75-16.5 | 10 | S8805       | TL   | 19       | 6.75    | 1410     | 520                | 225          | 772          |
| 225/75D16 | 10 | S8805       | TL   | 19       | 6.00    | 1605     | 790                | 224          | 770          |



S8807 (M+S)



| SIZE      | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-----------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|           |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 8.75-16.5 | 12 | S8807       | TL   | 25       | 6.75    | 1520     | 655                | 225          | 772          |
| 225/75D16 | 12 | S8807       | TL   | 25       | 6.00    | 1735     | 655                | 224          | 784          |



## BOOM LIFT TIRES



R-4



R-4 (NM)



| SIZE         | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|--------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|              |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 445/50D710   | 24 | R-4         | TL   | 25       | W15     | 12200    | 1000               | 445          | 1189         |
| 445/50D710   | 20 | R-4         | TL   | 25       | W15     | 7740     | 790                | 445          | 1189         |
| 445/50D710   | 18 | R-4         | TL   | 25       | W15     | 7300     | 690                | 445          | 1189         |
| 385/45-28    | 18 | R-4         | TL   | 25       | 13.00   | 8500     | 1000               | 376          | 1082         |
| 18-625       | 16 | R-4         | TL   | 25       | 15.00   | 6900     | 690                | 450          | 1033         |
| 15-625       | 16 | R-4         | TL   | 25       | 13.00   | 5580     | 690                | 385          | 1018         |
| 355/55D625   | 14 | R-4         | TL   | 22.5     | 11.75   | 3450     | 520                | 360          | 936          |
| 33X12D610    | 12 | R-4         | TL   | 20       | 10      | 3880     | 550                | 305          | 838          |
| 445/65-22.5  | 18 | R-4         | TL   | 32       | 13.00   | 9000     | 800                | 445          | 1180         |
| 385/65D22.5  | 18 | R-4         | TL   | 25       | 11.75   | 6900     | 690                | 389          | 1095         |
| 39X15-22.5   | 16 | R-4         | TL   | 25       | 13.00   | 5580     | 690                | 385          | 1018         |
| 315/55D20    | 12 | R-4         | TL   | 19       | 11      | 4000     | 560                | 319          | 848          |
| 385/65D19.5  | 16 | R-4         | TL   | 25       | 11.75   | 4935     | 690                | 397          | 994          |
| 385/65D19.5  | 14 | R-4         | TL   | 25       | 11.75   | 4625     | 590                | 397          | 994          |
| 240/55D17.5  | 12 | E-2         | TL   | 10       | 6.75    | 2800     | 735                | 230          | 725          |
| 14-17.5      | 14 | R-4         | TL   | 20       | 10.5    | 3875     | 520                | 348          | 913          |
| 33X15.5-16.5 | 14 | R-4         | TL   | 20       | 12      | 3980     | 490                | 394          | 838          |

385/65D19.5—15-19.5



HF-3



| SIZE      | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-----------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|           |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 26X12D380 | 8  | HF-3        | TL   | 16       | 10      | 1550     | 380                | 309          | 670          |

## CONSTRUCTION TIRES



X99 (L-4)



| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 12-16.5 | 14 | X99         | TL   | 40.5     | 9.75    | 3075     | 620                | 315          | 861          |
| 14-17.5 | 16 | X99         | TL   | 40       | 10.50   | 3875     | 550                | 349          | 921          |



X77 (E-2)



| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 12-16.5 | 14 | X77         | TL   | 30       | 9.75    | 3075     | 620                | 307          | 831          |



ZM722 (E-3)



| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 12-16.5 | 14 | ZM722       | TL   | 33.5     | 9.75    | 3075     | 620                | 315          | 861          |



X88 (L-5)



X89 (L-5)



| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 14-17.5 | 16 | X88         | TL   | 40       | 10.50   | 3875     | 550                | 349          | 945          |
| 12-16.5 | 14 | X88/X89     | TL   | 43       | 9.75    | 3075     | 620                | 315          | 861          |
| 10-16.5 | 14 | X88/X89     | TL   | 42       | 8.25    | 2725     | 725                | 270          | 785          |



## X89/ZM789 (L-5)



| SIZE       | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|            |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 27X8.50-15 | 10 | X89         | TL   | 33       | 7.00    | 1460     | 550                | 221          | 686          |
| 5.90-15    | 8  | X89         | TL   | 26       | 5.00    | 950      | 620                | 152          | 686          |
| 5.70-12    | 8  | X89         | TL   | 20       | 4.50    | 850      | 620                | 146          | 574          |
| 12-16.5    | 14 | ZM789       | TL   | 37       | 9.75    | 3075     | 620                | 315          | 861          |
| 10-16.5    | 14 | ZM789       | TL   | 36       | 8.25    | 2725     | 725                | 270          | 785          |



## I-3 / L-2



| SIZE       | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|            |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 12.5/80-18 | 12 | I-3         | TL   | 29       | 9.00    | 2625     | 365                | 312          | 1004         |
| 12-16.5    | 14 | L-2         | TL   | 22       | 9.75    | 3075     | 620                | 310          | 840          |



## R-4



| SIZE        | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 27X10.50-15 | 8  | R-4         | TL   | 23       | 8.50    | 1405     | 415                | 267          | 686          |
| 27X8.50-15  | 8  | R-4         | TL   | 23       | 7.00    | 1310     | 415                | 221          | 686          |
| 23X8.50-12  | 8  | R-4         | TL   | 18       | 7.00    | 920      | 415                | 221          | 596          |
| 12-16.5RG   | 12 | R-4         | TL   | 26       | 9.75    | 2865     | 550                | 321          | 820          |
| 12-16.5BG   | 10 | R-4         | TL   | 17       | 9.75    | 2540     | 450                | 321          | 820          |
| 10-16.5RG   | 10 | R-4         | TL   | 24       | 8.25    | 2135     | 520                | 274          | 774          |
| 10-16.5BG   | 8  | R-4         | TL   | 16       | 8.25    | 1880     | 415                | 274          | 774          |



## X-15 (R-4)



| SIZE        | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 31X15.5-15  | 12 | X-15        | TL   | 26       | 13.00   | 2100     | 415                | 402          | 802          |
| 26X12.00-12 | 12 | X-15        | TL   | 27       | 10.50   | 1940     | 520                | 300          | 670          |



## C328 / C7503 (R-1)



| SIZE        | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 31X15.50-15 | 8  | C7503       | TL   | 19       | 13.00   | 1980     | 310                | 402          | 802          |
| 29X12.5-15  | 8  | C7503       | TL   | 21.5     | 10.00   | 1950     | 320                | 325          | 770          |
| 26X12.00-12 | 8  | C328        | TL   | 19       | 10.50   | 1370     | 290                | 309          | 670          |



## S9101 (R-3)



| SIZE        | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 31X15.50-15 | 8  | S9101       | TL   | 14.3     | 13.00   | 1980     | 310                | 414          | 800          |
| 29X12.50-15 | 8  | S9101       | TL   | 13       | 10.00   | 1950     | 320                | 320          | 750          |
| 26X12.00-12 | 8  | S9101       | TL   | 11.2     | 10.50   | 1370     | 290                | 309          | 670          |

TRAILER TIRES



VR381

| SIZE      | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-----------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|           |    |             |      |          |         | (kg)      | (kPa)              |              |              |
|           |    |             |      |          |         | S/D       | S/D                |              |              |
| 7.00-15LT | 8  | VR381       | TL   | 9.5      | 5.50F   | 925/825   | 410                | 202          | 752          |
| 7.00-15LT | 10 | VR381       | TL   | 9.5      | 5.50F   | 1060/925  | 520                | 202          | 752          |
| 7.50-16LT | 10 | VR381       | TL   | 9.5      | 6.00G   | 1250/1120 | 520                | 220          | 808          |
| 7.50-16LT | 12 | VR381       | TL   | 9.5      | 6.00G   | 1405/1250 | 620                | 220          | 808          |
| 205/90D15 | 8  | VR381       | TL   | 9.5      | 5.50F   | 925/825   | 410                | 202          | 752          |
| 225/90D16 | 10 | VR381       | TL   | 9.5      | 6.00G   | 1250/1120 | 520                | 220          | 808          |
| 225/90D16 | 12 | VR381       | TL   | 9.5      | 6.00G   | 1405/1250 | 620                | 220          | 808          |



VR382

| SIZE        | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|             |    |             |      |          |         | (kg)     | (kPa)              |              |              |
|             |    |             |      |          |         | S/D      | S/D                |              |              |
| 8-14.5      | 10 | VR382       | TL   | 6.0      | 6.00    | 1180     | 590                | 203          | 707          |
| 8-14.5      | 12 | VR382       | TL   | 6.0      | 6.00    | 1285     | 690                | 203          | 707          |
| 8-14.5      | 14 | VR382       | TL   | 6.0      | 6.00    | 1375     | 760                | 203          | 707          |
| 215/60D14.5 | 14 | PA702       | TL   | 5.0      | 6.00    | 1405     | 760                | 196          | 632          |
| 235/60D14.5 | 14 | PA704       | TL   | 8.5      | 7.00    | 1590     | 760                | 235          | 665          |



P-1049

| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|          |    |             |      |          |         | (kg)      | (kPa)              |              |              |
|          |    |             |      |          |         | S/D       | S/D                |              |              |
| 10.00-20 | 14 | KT218       | TT   | 10.5     | 7.5     | 2800/2430 | 700/630            | 278          | 1040         |
| 11-22.5  | 12 | P-1049      | TL   | 11.0     | 8.25    | 2500/2180 | 590/520            | 279          | 1054         |
| 11-22.5  | 14 | P-1049      | TL   | 11.0     | 8.25    | 2800/2430 | 690/620            | 279          | 1054         |
| 11-22.5  | 16 | P-1049      | TL   | 11.0     | 8.25    | 3000/2650 | 790/720            | 279          | 1054         |



PA35

| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 8.25-15 | 18 | PA35        | TT   | 12       | 6.50T   | 4000     | 1000               | 235          | 840          |



PA707

| SIZE    | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|---------|----|-------------|------|----------|---------|-----------|--------------------|--------------|--------------|
|         |    |             |      |          |         | (kg)      | (kPa)              |              |              |
| 7.50-16 | 16 | PA707       | TT   | 11       | 6.00G   | 1580/1390 | 770                | 215          | 805          |

# LIGHT & HEAVY DUTY TRUCK TIRES



H-LUG      H-RIB      XT888      ZL319      HL928      M777

| SIZE     | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | 外直径<br>O.D.<br>(mm) |
|----------|----|-------------|------|----------|---------|-----------|--------------------|--------------|---------------------|
|          |    |             |      |          |         | (kg)      | (kPa)              |              |                     |
|          |    |             |      |          |         | S/D       | S/D                |              |                     |
| 12.00-24 | 18 | XT888       | TT   | 20       | 8.5     | 4250/3750 | 810/740            | 315          | 1247                |
| 12.00-20 | 18 | H-Lug       | TT   | 22       | 8.5     | 3725/3265 | 795/725            | 315          | 1145                |
|          | 18 | ZL319       | TT   | 17       |         | 3750/3350 | 810/740            | 315          | 1125                |
|          | 18 | H-Rib       | TT   | 15.4     |         | 3725/3265 | 795/725            | 315          | 1145                |
| 11.00-20 | 18 | M777        | TT   | 22       | 8.0     | 3650/3150 | 910/840            | 293          | 1105                |
|          | 18 | H-Lug       | TT   | 22       |         | 3265/2865 | 795/725            | 293          | 1105                |
|          | 18 | ZL319       | TT   | 15.5     |         | 3650/3150 | 910/840            | 293          | 1085                |
|          | 18 | ZR158/HL928 | TT   | 15.5/23  |         | 3650/3150 | 910/840            | 293          | 1085/1105           |
|          | 18 | H-Rib       | TT   | 16       |         | 3265/2865 | 795/725            | 293          | 1105                |
| 10.00-20 | 18 | M777        | TT   | 23       | 7.5     | 3350/2900 | 910/840            | 278          | 1073                |
|          | 16 | XT888       | TT   | 22.7     |         | 3000/2650 | 810/740            | 278          | 1073                |
|          | 16 | H-Lug       | TT   | 22       |         | 3000/2630 | 795/725            | 278          | 1073                |
|          | 16 | H-Rib       | TT   | 17.4     |         | 3000/2630 | 795/725            | 278          | 1073                |
|          | 16 | QZ312/NJ312 | TT   | 16       |         | 3000/2650 | 810/740            | 278          | 1055                |
|          | 16 | QZ198/NJ198 | TT   | 15       |         | 3000/2650 | 810/740            | 278          | 1055                |
|          | 16 | XT222       | TT   | 15.5     |         | 3000/2650 | 810/740            | 278          | 1055                |
| 9.00-20  | 18 | M777        | TT   | 22       | 7.0     | 3000/2650 | 910/840            | 259          | 1055                |
|          | 16 | H-Lug       | TT   | 22       |         | 2650/2325 | 795/725            | 259          | 1038                |
|          | 16 | QZ312/NJ312 | TT   | 16       |         | 2900/2500 | 880/810            | 259          | 1018                |
|          | 16 | QZ168/NJ168 | TT   | 14.5     |         | 2900/2500 | 880/810            | 259          | 1018                |
|          | 16 | H-Rib       | TT   | 15.4     |         | 2650/2325 | 795/725            | 259          | 1038                |
|          | 16 | NJ188       | TT   | 13.5     |         | 2900/2500 | 880/810            | 259          | 1018                |
|          | 18 | SUPER111    | TT   | 22       |         | 2650/2325 | 795                | 259          | 1055                |
| 8.25-20  | 16 | H-Lug       | TT   | 17.5     | 6.5     | 2430/2180 | 910/840            | 236          | 974                 |
|          | 16 | H-Rib       | TT   | 14       |         | 2430/2180 | 910/840            | 236          | 974                 |
| 7.50-20  | 14 | NJ188       | TT   | 13.5     | 6.0     | 1900/1700 | 810/740            | 215          | 935                 |
|          | 14 | ZL316       | TT   | 13.5     |         | 1900/1700 | 810/740            | 215          | 935                 |



H-LUG      H-RIB      V-LUG      V-RIB      ZM668      NJ328

| SIZE         | PR | PATTERN NO.         | TYPE | T.D.(mm)       | STD.RIM | MAX LOAD  | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|--------------|----|---------------------|------|----------------|---------|-----------|--------------------|--------------|--------------|
|              |    |                     |      |                |         | (kg)      | (kPa)              |              |              |
|              |    |                     |      |                |         | S/D       | S/D                |              |              |
| 8.25-16LT    | 20 | V-Lug               | TT   | 19             | 6.50H   | 2300/2000 | 850                | 235          | 855          |
|              | 16 | H-Lug, S-Lug, H-Rib | TT   | 17.8, 13.2, 13 |         | 1845/1755 | 655                | 235          | 855          |
|              | 16 | NJ328, NJ188        | TT   | 14, 12.5       |         | 1800/1600 | 730                | 235          | 855          |
|              | 14 | NJ328, NJ188        | TT   | 14, 12.5       |         | 1700/1500 | 630                | 235          | 855          |
| 7.50-16LT    | 18 | V-Lug               | TT   | 17.5           | 6.00G   | 1950/1800 | 850                | 215          | 805          |
|              | 16 | H-Lug, H-Rib        | TT   | 17.5, 12.8     |         | 1580/1390 | 760                | 215          | 805          |
|              | 14 | NJ328, NJ188        | TT   | 12, 11.5       |         | 1500/1320 | 730                | 215          | 805          |
| 7.00-16LT    | 14 | H-Lug               | TT   | 17.5           | 5.50F   | 1320/1180 | 730                | 200          | 800          |
|              | 14 | H-Rib               | TT   | 13             |         | 1320/1180 | 730                | 200          | 800          |
|              | 12 | NJ328, NJ188, ZL719 | TT   | 11.5, 11, 19   |         | 1215/1060 | 630                | 200          | 775          |
| 6.50-16LT    | 16 | V-Rib               | TT   | 11             | 4.50    | 1180/1030 | 650                | 175          | 755          |
|              | 10 | NJ328, NJ188        | TT   | 12, 10         | 5.50F   | 975/875   | 530                | 185          | 750          |
|              | 12 | ZL719               | TT   | 19             | 5.50F   | 1060/925  | 630                | 185          | 750          |
| 6.00-16LT    | 10 | NJ328, NJ188        | TT   | 10, 8          | 4.50E   | 850/750   | 530                | 170          | 730          |
| 7.50-15LT    | 14 | H-Lug, H-Rib        | TT   | 17, 12.8       | 6.00G   | 1420/1260 | 655                | 215          | 791          |
| 7.00-15LT    | 12 | H-Lug, H-Rib        | TT   | 16, 12.5       | 5.50F   | 1175/1030 | 620                | 200          | 760          |
| 6.50-15LT    | 8  | JQ316, JQ118        | TT   | 10             | 4.50E   | 825/730   | 420                | 180          | 730          |
| 6.00-15LT    | 8  | ZL316, ZR118        | TT   | 10             | 4.50E   | 730/630   | 420                | 170          | 705          |
|              | 8  | ZL719               | TT   | 15.5           |         | 730/630   | 420                | 170          | 705          |
| 6.50-14LT    | 12 | H-Lug, H-Rib        | TT   | 12.5           | 4 1/2J  | 915/850   | 480                | 180          | 705          |
| 6.50-14      | 8  | ZM668               | TT   | 14.5           | 4 1/2J  | 775/690   | 420                | 180          | 705          |
| 6.00-14LT    | 8  | NJ328, NJ188        | TT   | 9              | 4 1/2J  | 690/600   | 420                | 170          | 680          |
|              | 8  | ZL719               | TT   | 15.5           | 4 1/2J  | 690/600   | 420                | 170          | 680          |
| 6.40/6.50-13 | 6  | ZM668               | TT   | 14             | 4 1/2J  | 515       | 250                | 160          | 620          |
| 5.00-12      | 14 | V-Lug               | TT   | 10             | 3.50B   | 800/750   | 600/575            | 150          | 596          |
|              | 12 | ZM668               | TT   | 14             | 3.50B   | 585/535   | 530                | 135          | 582          |
| 6.00-13LT    | 8  | ZL316, NJ188        | TT   | 9              | 4.50B   | 650/580   | 420                | 170          | 655          |
| 5.50-13LT    | 14 | ZL719L              | TT   | 14             | 4.50    | 900/800   | 700                | 185          | 680          |
| 6.00-12      | 6  | ZM668               | TT   | 15             | 4.50E   | 405       | 420                | 165          | 625          |

MUD ATV TIRES



R-1A

| SIZE       | PR | PATTERN NO. | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|------------|----|-------------|------|----------|---------|----------|--------------------|--------------|--------------|
|            |    |             |      |          |         | (kg)     | (kPa)              |              |              |
| 35X9.00-20 | 4  | R-1A        | TL   | 43.5     | W7      | 450      | 50                 | 215          | 880          |



AGRICULTURAL TIRES



NJ188      ZL316      ZR132      ZL512 / R-1      SL619      ZR112

| SIZE      | PR    | PATTERN NO.  | TYPE | T.D.(mm) | STD.RIM | MAX LOAD | INFLATION PRESSURE | S.W.<br>(mm) | O.D.<br>(mm) |
|-----------|-------|--------------|------|----------|---------|----------|--------------------|--------------|--------------|
|           |       |              |      |          |         | (kg)     | (kPa)              |              |              |
|           |       |              |      |          |         | S/D      | S/D                |              |              |
| 12.4-28   | 12    | R-1          | TT   | 17       | W11     | 1650     | 250                | 329          | 1285         |
| 9.5-24    | 8     | ZL512        | TT   | 30       | W8      | 1110     | 280                | 240          | 1050         |
| 9.00-20   | 10    | SL629        | TT   | 22       | 7.0     | 1420     | 340                | 225          | 920          |
| 7.50-20   | 10    | HS27B        | TT   | 18       | 5.50F   | 1020     | 370                | 190          | 910          |
| 7.50-16   | 12    | SL619、ZR621  | TT   | 19.5     | 5.50F   | 1305     | 520                | 205          | 810          |
|           | 6     | ZL512        | TT   | 24       |         | 650      | 210                | 205          | 810          |
| 6.70-14   | 12/14 | H-Rib        | TT   | 12.5     | 4 1/2J  | 915/850  | 480                | 190          | 720          |
| 6.50-16   | 6     | ZR132        | TT   | 16       | 4.50E   | 615      | 310                | 175          | 760          |
| 6.00-16   | 6     | ZR132        | TT   | 16       | 4.00E   | 560      | 340                | 160          | 740          |
| 5.50-16   | 10    | NJ188        | TT   | 9        | 4.00E   | 1500     | 650                | 150          | 685          |
|           | 10    | NJ328、ZL316  | TT   | 10       |         | 1500     | 650                | 150          | 685          |
| 5.00-16   | 8     | NJ328、ZL316  | TT   | 10       | 3.00D   | 1100     | 630                | 132          | 675          |
| 4.50-16   | 8     | ZL316        | TT   | 10       | 3.00D   | 1000     | 560                | 122          | 655          |
| 5.00-15   | 6     | ZR132        | TT   | 12.5     | 4 J     | 465      | 420                | 140          | 665          |
| 26X9-14.5 | 24    | S-109        | TT   | 5        | 6.00    | 907      | 345                | 228          | 660          |
| 24X8-14   | 20    | S-109        | TT   | 5        | 6.00    | 907      | 345                | 203          | 610          |
| 5.00-14   | 8     | NJ328、ZL316  | TT   | 8        | 3.00D   | 600      | 420                | 132          | 624          |
| 4.50-14   | 8     | NJ328、ZL316  | TT   | 8        | 3.00D   | 450      | 420                | 122          | 595          |
|           | 8     | NJ188        | TT   | 7        |         | 450      | 420                | 122          | 595          |
| 4.00-14   | 8     | ZR132        | TT   | 11       | 3.00D   | 270      | 340                | 110          | 590          |
| 5.50-13   | 8     | NJ188        | TT   | 8        | 4.00B   | 560/500  | 420                | 160          | 620          |
| 21X7-12   | 16    | S-109        | TT   | 5        | 5.50    | 907      | 345                | 178          | 533          |
| 6.00-12   | 6     | ZL512、ZL512A | TT   | 24       | 4.50E   | 310      | 180                | 165          | 640          |
| 5.00-12   | 8     | ZR112        | TT   | 8.5      | 3.50B   | 487/462  | 400                | 143          | 568          |
| 4.50-12   | 8     | ZR112        | TT   | 8.5      | 3.00B   | 412/400  | 400                | 127          | 545          |
| 4.00-12   | 4     | NJ328        | TT   | 7        | 3.00D   | 250      | 340                | 113          | 530          |